





InNovative Design & Quality from DENMARK

AN INDUSTRIAL TRADITION, WHICH WE PROUDLY CONTINUE

Denmark has always been a pioneer in the development of individual freezing units.

Mass production of freezers started here around 1960, and Elcold has been in the industry right from the start.

For more than 50 years, we at Elcold have constantly been focused on improving our products. We have acquired a vast experience, which today enables us to make some of the finest and most reliable freezers and coolers on the market. The key words are high quality and inNovative design.

Elcold is certified according to the ISO 9001/2015 Quality Assurance System as well as the ISO 14001:2015 Environmental Management System.

MANAGEMENT SYSTEM CERTIFICATE

Certificate No:
197889-2016-AE-DEN-DANAK

Initial certification date:
30 March, 1994

Valid:
11 April, 2016 - 15 April, 2019

This is to certify that the management system of

Elcold Fryser ApS

Løgstørvej 81, DK-9500, Hobro, Denmark

has been found to conform to the Management System standards:

DS/EN ISO 9001:2015 & DS/EN ISO 14001:2015


This certificate is valid for the following scope:

Development, production and sale of refrigerators and freezers for household- and commercial use, wholesale of refrigerators and freezers

Place and date:
Hellerup, 11 April, 2016



For the issuing office:
DNV GL - Business Assurance
Tuborg Parkvej 8, 2., DK-2900, Hellerup,
Denmark



Jesper Schultz
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.

ACCREDITED UNIT: DNV GL Business Assurance Denmark A/S, Tuborg Parkvej 8, DK-2900 Hellerup, Denmark. TEL: +45 39 45 48 00.
<http://assurance.dnvgl.com>

TABLE OF CONTENTS

DISPLAY FREEZERS

FOCUS	8
NOVA	10
INTELLIGENT FREEZER	12
SCOOP	13
CT & DUO	14
MOBILUX	15
CSG	16
CAL	18
CVG	20
EL-LTS	22
VISION	24

STORAGE FREEZERS

EL	28
EL SS	30
XLE	32
UNI	34
PRO FOR TUNA FISH	36

SUPERMARKET FREEZERS

DSM	40
ESM	42
GSM	44
FSM	46

DISPLAY COOLERS

CABC & CBC	50
EBC	52
CAN COOLER & ESC	54
COMBI	55

LABORATORY EQUIPMENT

LAB	58
PRO	60
UNI	62

ACCESSORIES

BASKETS	64
SUPERMARKET FREEZERS ..	67
ADDITIONAL EQUIPMENT ..	68

GENERAL EXPLANATION:

Throughout this book, we inform about different climate classes.
Our information is based on the following:

Climate class 4:	30 degree Celsius / 55 % Relative Humidity
Climate class 7 (4+):	35 degree Celsius / 70 % Relative Humidity
Climate class 5:	40 degree Celsius / 70 % Relative Humidity
Climate class 7 and 4+ are considered to be the same.	

All contents and temperatures are base on measurements made
in the load line according to EN 23953.
Some photos may contain parts which are Not supplied as standard.



DISPLAY
FREEZERS



| FOCUS |

WORLD CLASS INNOVATION

The new FOCUS freezer has an elegant, yet robust, design to optimally catch the attention of your customers. The lid design, the improved insulation and the heated frame ensure minimum ice build-up. Cyclopentane is used as blowing agent and the cabinets are CFC free.

FEATURES

- Environmentally friendly
- Low service costs
- Perfect view to the products
- Custom made design
- Long life
- Available in all climate classes
- Graphics (option)
- Minimum icebuild-up
- Designed for transport
- Eye Catching design
- LED internal light (option)
- 75 mm insulation
- Also available as combination of cooler and freezer- see page 55.
- Accessories including baskets - see page 64



FOCUS 73 GREY



FOCUS 106 BLUE



FOCUS 131 RED



PLEXI DIVIDER



FOCUS 151 RED




FOCUS 171 BLUE

THINK GREEN

SAVE UP TO 30% ENERGY

The FOCUS freezer is designed to match the requests and demands from the ice cream and frozen foods industries. Therefore, attention has been on developing a freezer which is environmentally friendly throughout its complete life cycle, keeping total life cycle costs as low as possible. Energy consumption reduced by up to 30% (Tested according to EN441). Also available as cooler.

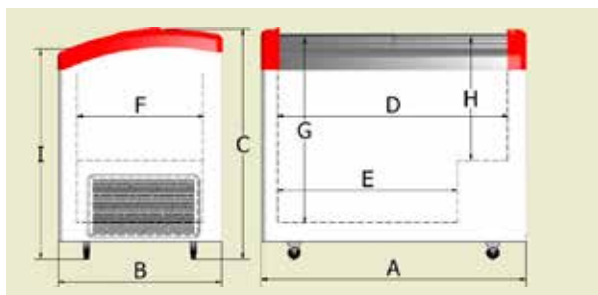

Dimensions according to technical data below



	FOCUS 73	FOCUS 106	FOCUS 131	FOCUS 151	FOCUS 171
Climate class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	161	270	352	418	484
Net volume, litres	113	193	254	302	351
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Temp range as cooler	+2 to +8	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Standard refrigerant	R600a	R600a	R600a	R290	R290
Refrigerants available: R134a/R290/ R404a/R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh at 30 deg. C	2,2 (R600a)	2,5 (R600a)	2,8 (R600a)	3,7 (R290)	4,4 (R290)
Input power (watt)	141	155	211	230	230
DIMENSIONS					
External dimensions (WxDxH)	726x656x850	1056x656x850	1306x656x850	1506x656x850	1706x656x850
Internal dimensions (WxDxH)	570x500x670	900x500x670	1150x500x670	1350x500x670	1550x500x670
Dimension A	726	1056	1306	1506	1706
Dimension B	656	656	656	656	656
Dimension C	850	850	850	850	850
Dimension D	570	900	1150	1350	1550
Dimension E	370	700	950	1150	1350
Dimension F	500	500	500	500	500
Dimension G	670	670	670	670	670
Dimension H	420	420	420	420	420
Dimension I	770	770	770	770	770
Insulation (mm)	75	75	75	75	75
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (model C75-01/ C75-02)	2/3	4/4	5/6	6/7	7/8
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	Optional	Optional	Optional	Optional	Optional
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
UL approval / DOE approval	Yes	Yes	Yes	Yes	Yes
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	44	54	62	68	73
Gross weight, kg	47	58	66	73	79
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	135	96	75	68	59
Standard Trailer capacity	153	108	90	75	66



S-DISPLAY



| NOVA |

77 MM INSULATION
SELF CLOSING LID (PARTIALLY)

FEATURES

- Low service costs
- Custom made design
- Long life
- Available in all climate classes
- Graphics (option)
- Scoope (option)
- 5 different sizes
- Partially self closing lid
- 77 mm insulation
- Environmental friendly
- Accessories including baskets
- see page 64

At first sight it may look like a traditional freezer for ice cream, but furthermore we can offer very high quality and reliability.

This means that the customer can just plug it in and forget about it for years to come - it will simply do its job.



NOVA 22



NOVA 35




NOVA 45



NOVA 53



NOVA 61

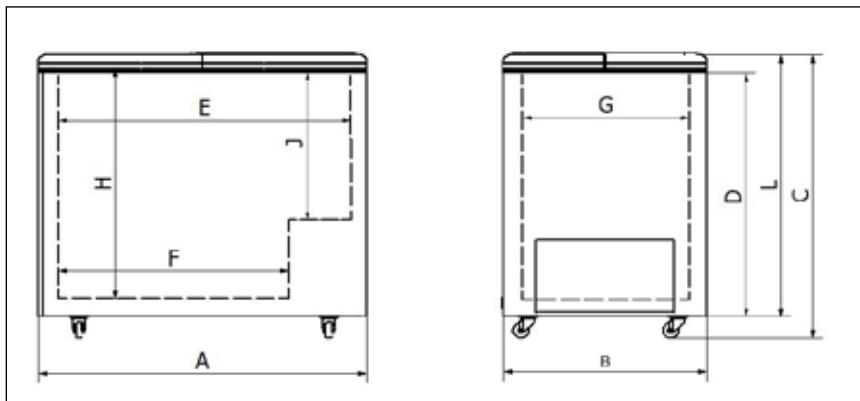

Rail for self closing lid.

	NOVA 22	NOVA 35	NOVA 45	NOVA 53	NOVA 61
Climate class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	189	306	395	466	537
Net volume, litres	147	242	313	371	428
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Standard refrigerant:	R600a	R600a	R600a	R290	R290
Refrigerants available: R134a, R290, R404a, R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24h kwh at 30 deg. C, Climate class 4	1,83 (R600a)	2,37 (R600a)	2,74 (R600a)	3,85 (R290)	4,58 (R290)
Input power (watt)	141	153	203	204	230
DIMENSIONS					
External dimensions (WxDxH)	763x693x817	1093x693x817	1343x693x817	1543x693x817	1803x693x817
Internal dimensions (WxDxH)	606x536x638	936x536x638	1186x536x638	1386x536x638	1646x536x638
Dimension A	763	1093	1343	1543	1803
Dimension B	693	693	693	693	693
Dimension C	817	817	817	817	817
Dimension D	714	714	714	714	714
Dimension E	606	936	1186	1386	1646
Dimension F	406	736	986	1186	1446
Dimension G	536	536	536	536	536
Dimension H	638	638	638	638	638
Dimension J	388	388	388	388	388
Dimension L	748	748	748	748	748
Insulation (mm)	77	77	77	77	77
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max number of baskets (option)	2	3	4	4	5
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a
Outer cabinet	White	White	White	White	White
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 volt / 60 Hz	Optional	Optional	Optional	Optional	Optional
UL / DOE approval	Yes	Yes	Yes	Yes	Yes
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	45	53	61	68	71
Gross weight, kg	48	57	65	72	75
SHIPPING					
20' cont. capacity	42	30	24	20	18
40' cont. capacity	84	62	50	44	38
40' HC cont. capacity	126	91	74	64	55
Standard trailer capacity	153	105	84	78	66

| DIGITAL DISPLAY SYSTEM |

TRENDSETTING INNOVATION

FEATURES

- Effective promotion
- Trendsetting marketing possibilities
- Eye Catching design
- Perfect view to the product
- Available in all climate classes



SQUARE 32



STRETCH 37

THE EYE CATCHING product offers high flexibility and helps to minimize logistic costs.

The system consists of a high quality digital screen fixed with a bracket onto the back of the Focus freezer. All Focus freezers, Focus 73, Focus 106, Focus 131, Focus 151 and Focus 171 can work along with the digital screen. Just insert a USB with a film, and the screen will run automatically. A timer will make it possible to run the film whenever you want. Two different screens are available. The standard version is the 32" screen – shaped as a standard television screen. The deluxe version, is a 37" stretch screen, which is quite wide but Not very high.

WIDTH	HEIGHT	DEPTH	WEIGHT
Square 32 72,1 cm	42,0	4,0 cm	4,4 kg
Stretch 37 91,6 cm	28,1 cm	39,9 cm	6,6 kg

Minimum quantity applies.

| SCOOP |

PRESENTATION & VISIBILITY



CLASSICAL CLASS CANOPY



DE LUXE CANOPY



Using the Elcold stainless steel holder, it is possible for the customers to use their own stainless steel container



WIRED BASKETS FOR SCOOPING

FEATURES

- High Quality
- Available for Nova 22 to Nova 61 freezers
- Elegant design
- Illuminated sneezeguard
- Scoop baskets available
- Graphics (option)
- Available in all climate classes

Presentation and visibility are the key words when selling ice cream in the consumer market. Most customers make their final purchase decision on the point of sales. Therefore it is important, that the customers notice your ice cream freezer.

With the Elcold Scoop ice cream program, you are offered the possibility to create your own ice cream freezer solution to match your needs and optimize your promotion. You can combine the standard ice cream freezer with the Elcold canopies (Sneezeguards).

Two versions are available. One is illuminated and has curved sides, the other one has straight sides. Both versions come with an eye catching and appealing design

STAINLESS SCOOP PLATES

FREEZER MODEL	NUMBER OF PLATES W. 2 POSITIONS	NUMBER OF PLATES W. 3 POSITIONS	NUMBER OF DIFF 5 LITER FLAVOURS
Nova 22	0	1	3
Nova 35	1	1	5
Nova 45	3	0	6
Nova 53	1	2	8
Nova 61	0	3	9

WIRE BASKETS FOR SCOOP

FREEZER MODEL	NUMBER OF BASKETS (3 + 1 ACROSS)	NUMBER OF BASKETS (4 + 1 ACROSS)	NUMBER OF DIFF 5 LITER FLAVOURS
Nova 22	0	1	5
Nova 35	2	0	8
Nova 45	0	2	10
Nova 53	3	0	12
Nova 61	2	1	13

| CT & DUO |

PERFECT VIEW



	DUO 80	DUO 127	CT 5
Climate class	3	3	4
Ambient temperature range	+10 to +25	+10 to +25	+16 to +30
Gross volume, litres	123	224	43
Net volume, litres	82	139	43
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -35
Refrigerants available:	R404a / R290	R404a / R290	404a
Energy consumption/ 24 h	9,03 (R290)	14,62 (R290)	2,5 (R404a)
Input power (watt)	447	850	211
DIMENSIONS			
External dim. (WxDxH)	800x750x1178	1270x750x1178	770x570x400
Internal dim. (WxDxH) upper	670x325x380	1140x325x380	379x379x260
Internal dim. (WxDxH) lower	670x530x440	1140x530x440	
Insulation (mm)	60	60	75
ACCESSORIES			
Divider	2 in top section/ 2 in lower section	4 in top section/ 4 in lower section	Optional
Feet	Incl.	Incl.	n/a
Lock	n/a	n/a	Incl.
Thermometer	Analog	Analog	Controller
Digital controller	n/a	n/a	Incl.
Internal light	Incl.	Incl.	n/a
OTHER DATA			
Outer cabinet	White	White	Silver
Inner cabinet	Painted steel	Painted steel	Black
Graphics	Optional	Optional	Optional
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional
Net weight, kg	83	123	36
Gross weight, kg	93	135	39
SHIPPING			
20' cont. Capacity	14	11	69
40' cont. Capacity	28	22	192
40' cont. HC Capacity	28	22	n/a
Standard Trailer capacity	64	52	330

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)

MINIMUM QUANTITY APPLIES

| MOBILUX |

COMBI VERSION OF FREEZER AND COOLER

OPTION: Working up to 40 degrees ambient temperature. **OPTION:** Scoop.
Unique system working with input of 110 volt/ 230 volt to a charger, which charges a 12 volt gel battery.
Once it is loaded, it will run a 12 volt compressor.



TRICYCLE FOR MOBILUX 11

TRICYCLE	
Dimensions of package (wxdxh)	60x80x150 cm
Weight of package (kg)	30
Dimensions unpacked (wxdxh) (Incl. freezer)	210x90x118 cm
FEATURES:	
Handbrake	Yes
Internal brake	Yes
Internal gears, pcs	3



MOBILUX 11 FREEZER WITH SCOOP CONTAINER

FEATURES

- Low service costs
- Long life
- Graphics (option)
- Combi version of cooler and freezer
- Accessories including baskets
- see page 64



CONTROL PANEL

	MOBILUX 11	MOBILUX 21
Climate class 4	4	4
Ambient temperature range	+16 to +30	+16 to +30
Climate class 5	5	n/a
Ambient temperature range	+16 to +43	-
Gross volume, litres	144	249
Net volume, litres	117	206
Temperature range inside unit	-18 or +4	-18 or +4
Standard refrigerant	R290	R290
Energy consumption / 24 h. Climate class 4 (kwh) 60 % running time	0,9	1,2
Input power for R290 (watt)	59	83
DIMENSIONS		
External dimensions (WxDxH)	724x654x916	1054x654x916
Internal dimensions (WxDxH)	520x450x686	850x450x686
Dimension A	724	1054
Dimension B	654	654
Dimension C	916	916
Dimension D	780	780
Dimension E	520	850
Dimension F	320	650
Dimension G	450	450
Dimension H	686	686
Dimension J	436	436
Dimension L	846	846
Insulation (mm)	100	100
ACCESSORIES		
Max. number of baskets (option)	2	4
Scoop baskets available	Yes	n/a
Castors	Incl.	Incl.
Castors w. brakes	Optional	Optional
Charger and battery Incl.	Yes	Yes
Lock	Optional	Optional
Thermometer	Optional	Optional
Internal light	n/a	n/a
OTHER DATA		
Outer cabinet	White	White
Inner cabinet	Aluminum	Aluminum
Graphics	Optional	Optional
Type of cooling	Static	Static
Type of defrost	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional
Thermostat	Mechanical	Mechanical
Net weight, kg	56	69
Gross weight, kg	62	75
SHIPPING		
20' cont. Capacity	42	30
40' cont. Capacity	90	64
Standard Trailer capacity	102	74

*FOR DIMENSIONS SEE PAGE 19



CSG 73

| CSG |

TOP CLASS **DISPLAY**

At first sight it may look like a traditional freezer for ice cream, but furthermore we can offer very high quality and reliability. This means that the customer can just plug it in and forget about it for years to come - it will simply do its job.

FEATURES

- Low service costs
- Perfect view to the products
- Custom made design
- Long life
- Available in all climate classes
- Graphics (option)
- Scoope (option)
- 8 different freezers available
- Accessories including baskets
- see page 64



CSG 18



CSG 22



CSG 35




CSG 45



CSG 53



CSG 61

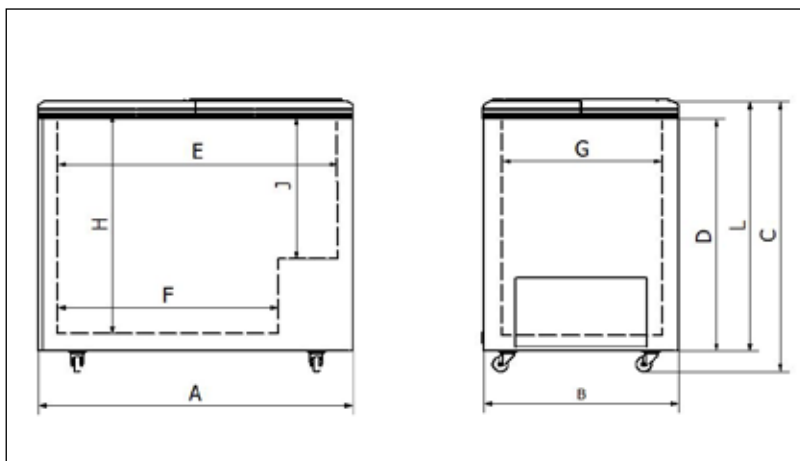

	CSG 18	CSG 22	CSG 35	CSG 45	CSG 53	CSG 61	CSG 73	CSG 74
Climate class 4	4	4	4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	170	217	349	450	530	611	700	677
Net volume, litres	146	188	304	393	441	509	622	527
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Refrigerants available: R134a/ R290/R404a/R600a	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh (R134a) at 30 deg. C	2,7	2,7	3,2	4,2	5,6	5,6	6,7	6,7
Input power for R134a (watt)	141	141	166	226	290	290	350	350
DIMENSIONS								
External dimensions (WxDxH)	628x628x916	724x654x916	1054x654x916	1304x654x916	1504x654x916	1704x654x916	1804x694x916	1754x744x878
Internal dimensions (WxDxH)	510x510x750	606x536x750	936x536x750	1186x536x750	1386x536x750	1586x536x750	1686x576x750	1636x626x692
Dimension A	628	724	1054	1304	1504	1704	1804	1754
Dimension B	628	654	654	654	654	654	694	744
Dimension C	916	916	916	916	916	916	916	878
Dimension D	780	780	780	780	780	780	780	742
Dimension E	510	606	936	1186	1386	1586	1686	1636
Dimension F	310	406	736	986	1186	1386	1486	1436
Dimension G	510	536	536	536	536	536	576	626
Dimension H	750	750	750	750	750	750	750	692
Dimension J	500	500	500	500	500	500	500	442
Dimension L	846	846	846	846	846	846	846	808
Insulation (mm)	60	60	60	60	60	60	60	60
ACCESSORIES								
Dividers	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (Optional)	0	2	3	4	4	4	6	n/a
Castors	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
OTHER DATA								
Outer cabinet	White	White	White	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Graphics	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220v/50Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional	Optional	Optional	n/a
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	45	47	54	64	67	77	85	86
Gross weight, kg	51	50	58	68	71	82	89	90
SHIPPING								
20' cont. Capacity	48	42	30	24	20	18	14	14
40' cont. Capacity	102	90	64	50	46	40	30	28
40' HC cont. Capacity	138	126	88	62	61	52	42	41
Standard Trailer capacity	120	102	74	60	52	44	42	32



FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Graphics (option)
- Custom made design
- Accessories including baskets
- see page 64

| CAL | RELIABLE STORAGE



CAL 22



CAL 35




CAL 45



CAL 53



CAL 61

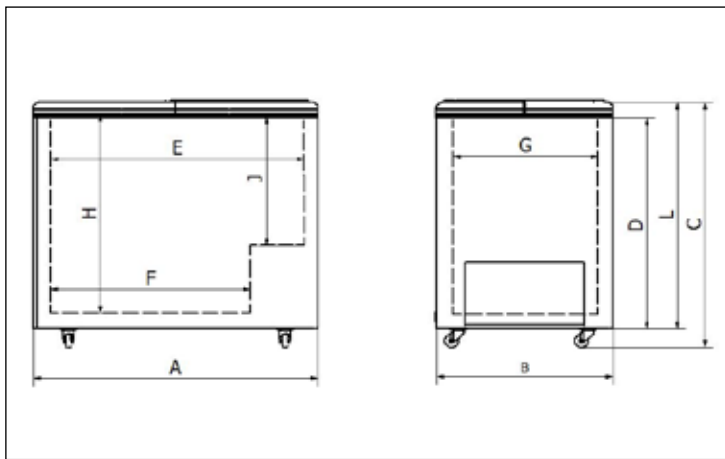

	CAL 22	CAL 35	CAL 45	CAL 53	CAL 61
Climate class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	209	337	435	513	590
Net volume, litres	188	304	393	441	509
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Refrigerants available: R134a / R404a / R290 / R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh (R134a) at 30 deg C	2	2,4	3,3	4,2	4,2
Input power for R134a (watt)	141	166	226	290	290
DIMENSIONS					
External dimensions (WxDxH)	724x654x916	1054x654x916	1304x654x916	1504x654x916	1704x654x916
Internal dimensions (WxDxH)	606x536x726	936x536x726	1186x536x726	1386x536x726	1586x536x726
Dimension A	724	1054	1304	1504	1704
Dimension B	654	654	654	654	654
Dimension C	916	916	916	916	916
Dimension D	780	780	780	780	780
Dimension E	606	936	1186	1386	1586
Dimension F	406	736	986	1186	1386
Dimension G	536	536	536	536	536
Dimension H	726	726	726	726	726
Dimension J	476	476	476	476	476
Dimension L	846	846	846	846	846
Insulation (mm)	60	60	60	60	60
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets	2	3	4	4	4
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel Inner Liner	Steel Inner Liner	Steel Inner Liner	Steel Inner Liner	Steel Inner Liner
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44



CVG 61

| CVG |

IDEAL FOR SUPERMARKETS

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Available in all climate classes
- Graphics (option)
- Different divider systems available
- Option: Bumperbar and kickplate
- Accessories including baskets - see page 64

The CVG freezer is the perfect freezer solution for supermarkets. The large glass lid does Not only ensure an optimal display area – but also a low energy consumption compared with open freezers.



CVG 35




CVG 53



CVG 61



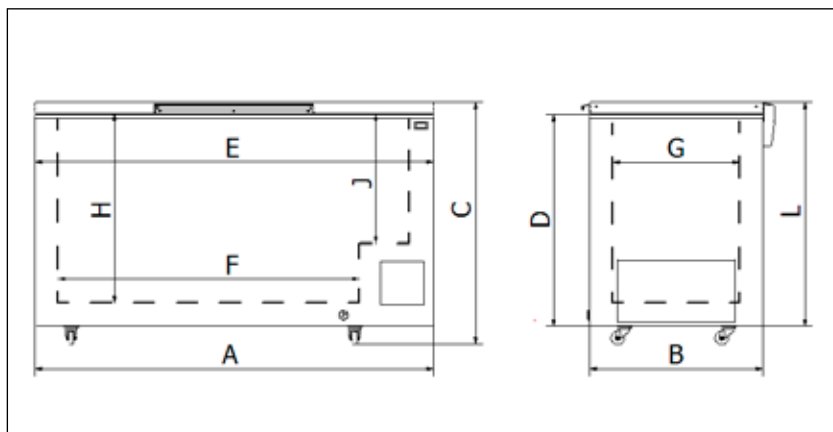

	CVG 22	CVG 35	CVG 45	CVG 53	CVG 61
Climate class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	209	337	435	513	590
Net volume, litres	183	298	385	454	524
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Refrigerants available: R134a / R404a / R290 / R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh (R134a) at 30 deg C.	2	2	3,3	3,3	4,5
Input power for R134a (watt)	141	141	226	217	313
DIMENSIONS					
External dimensions (WxDxH)	724x654x910	1054x654x910	1304x654x910	1504x654x910	1704x654x910
Internal dimensions (WxDxH)	606x536x760	936x536x760	1186x536x760	1386x536x760	1586x536x760
Dimension A	724	1054	1304	1504	1704
Dimension B	654	654	654	654	654
Dimension C	910	910	910	910	910
Dimension D	780	780	780	780	780
Dimension E	606	936	1186	1386	1586
Dimension F	406	736	986	1186	1386
Dimension G	536	536	536	536	536
Dimension H	760	760	760	760	760
Dimension J	510	510	510	510	510
Dimension L	840	840	840	840	840
Insulation (mm)	60	60	60	60	60
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (model c145/c150)	2/2	4/3	5/4	6/4	7/5
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	n/a	n/a	n/a	n/a	n/a
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a
Bumper bar & kickplate	Optional	Optional	Optional	Optional	Optional
Supermarket divider	n/a	n/a	n/a	n/a	Optional
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Steel inner liner	Optional	Optional	Optional	Optional	Optional
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power 220 v/ 50 Hz	Optional	Optional	Optional	Optional	Optional
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44



EL 31 LTS

| EL-LTS |

LOW TEMPERATURE DISPLAY FREEZER

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)
- Digital controller
- Acoustic alarm
- Down to -35°C
- Digital controller with potential free contact, (which makes it possible to connect it to an external alarm-.)
- Accessories including baskets - see page 64

Low temperatures are often essential when you need to store special ice cream or special kind of food. With this freezer you get the best guarantee to maintain the desired low temperature. The EL-LTS range from Elcold offers temperatures down to -35 C degree at a constant level and monitored on the digital display.



EL 11 LTS





EL 21 LTS



EL 31 LTS



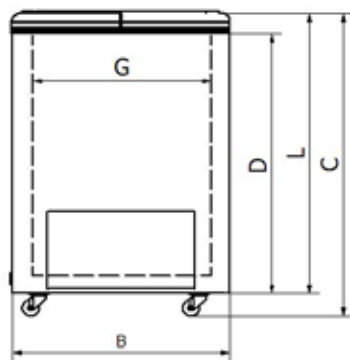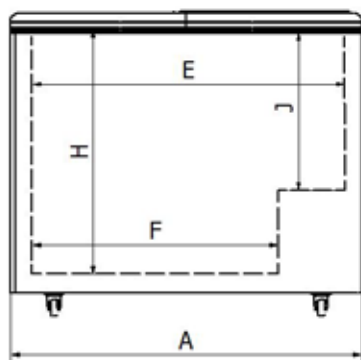

	EL 11 LTS	EL 21 LTS	EL 31 LTS
Climate Class 4	4	4	4
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300
Net volume, litres	116	203	270
Temperature range inside unit	-10 to -35	-10 to -35	-10 to -35
Refrigerant: R290	Yes	Yes	Yes
Energy consumption / 24 h (kwh)	n/a	n/a	n/a
Input power (watt):	190	305	340
DIMENSIONS			
External dimensions (WxDxH)	725x655x916	1055x655x916	1305x655x916
Internal dimensions (WxDxH)	520x450x710	850x450x710	1100x450x710
Dimension A	725	1055	1305
Dimension B	655	655	655
Dimension C	916	916	916
Dimension D	780	780	780
Dimension E	520	850	1100
Dimension F	320	650	900
Dimension G	450	450	450
Dimension H	710	710	710
Dimension J	460	460	460
Dimension L	846	846	846
Insulation, mm	100	100	100
ACCESSORIES			
Dividers	Optional	Optional	Optional
Baskets	Optional	Optional	Optional
Castors	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional
Lock	Optional	Optional	Optional
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.
Potential free contact	Yes	Yes	Yes
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional
UL / DOE approval	Yes	Yes	Yes
Potential free contact	Yes	Yes	Yes
Net weight, kg	46	59	67
Gross weight, kg	49	62	71
SHIPPING			
20' cont. Capacity	42	30	24
40' cont. Capacity	90	64	50
Standard Trailer capacity	102	74	60

| VISION |

EASY ACCESS AND PERFECT VISIBILITY

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)



VISION ESD 46



VISION ESD 76



VISION ESD 92




VISION EKF 870



VISION 60



VISION 320

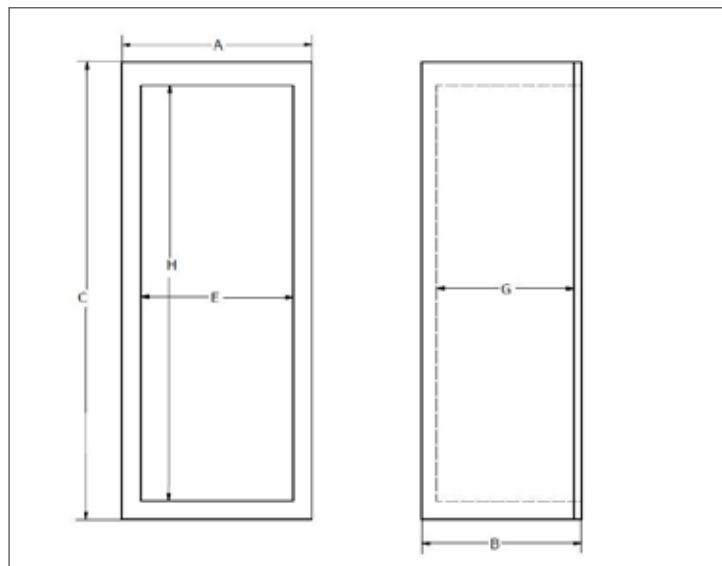

	VISION ESD46	VISION ESD 76	VISION ESD 92	VISION EKF 870	VISION 60	VISION 320
Climate class	3	3	3	3	4	4
Ambient temp. range	+16 to +25	+16 to +25	+16 to +25	+16 to +25	+16 to +30	+16 to +30
Volume	45	92	92	370	60	330
Temperature range inside unit	-9 to -24	-9 to -24	-9 to -24	-12 to -24	-14 to -23	-14 to -23
Refrigerants available: R134 a	R134a	R134a	R134a	R404a	R134a	R404a/R290
Input power (watt)	150	195	195	654	100	755
Energy consumption(kwh)/ 24 h	2,35	2,8	2,95	9,8	3,5	10,75 (R404a)
DIMENSIONS						
External dimensions (WxDxH)	570x500x500	595x516x688	595x540x855	660x663x2110	570x610x635	660x630x1960
Internal dimensions (WxDxH)	500x350x358	485x376x540	485x376x540	544x490x1344	570x500x470	540x450x1330
Dimension A	570	595	595	660	570	660
Dimension B	500	516	540	663	610	630
Dimension C	500	688	855	2110	635	1960
Dimension E	500	485	485	544	450	540
Dimension G	350	376	376	490	420	450
Dimension H	358	540	540	1344	470	1330
Insulation (mm)	35	55	55	58	60	60
ACCESSORIES						
Castors/ feet	feet	Incl.	feet	Incl.	2pcs Incl.	2 pcs Incl.
Shelves	2	3	3	6	2	6
Lock	n/a	n/a	n/a	Yes	n /a	Incl.
Thermometer	n/a	n/a	n/a	Yes	n/a	Incl.
Internal light	LED	LED	LED	Vertical LED	n/a	Optional
OTHER DATA						
Outer cabinet	White	White	White	White	White	White
Inner cabinet	White	White	White	White	Stainless	White
Graphics	Optional	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Ventilated	Static	Static
Type of defrost	Manual	Manual	Manual	auto	Manual	Manual
Fixed shelves w evaporator	Yes	Yes	No	No	No	Yes
Power	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Thermostat	mechanical	mechanical	mechanical	digital	mechanical	mechanical
Net weight	30	55	65	116	44	120
Gross weight	34	60	70	125	52	124
SHIPPING						
20 ft container capacity	160 pcs	111 pcs	74 pcs	24 pcs	48 pcs	24 pcs
40 ft container capacity	328 pcs	231 pcs	154 pcs	48 pcs	153 pcs	48 pcs
40 ft HC container capacity	410 pcs	234 pcs	234 pcs	48 pcs	n/a	n/a
Minimum quantity will apply					Yes	Yes

MINIMUM QUANTITY APPLIES FOR VISION 60 AND VISION 320

STORAGE FREEZERS





EL 71

FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Graphics (option)
- Accessories including baskets
- see page 64

| EL |
RELIABLE STORAGE



EL 12



EL 22



EL 35




EL 45



EL 53



EL 61

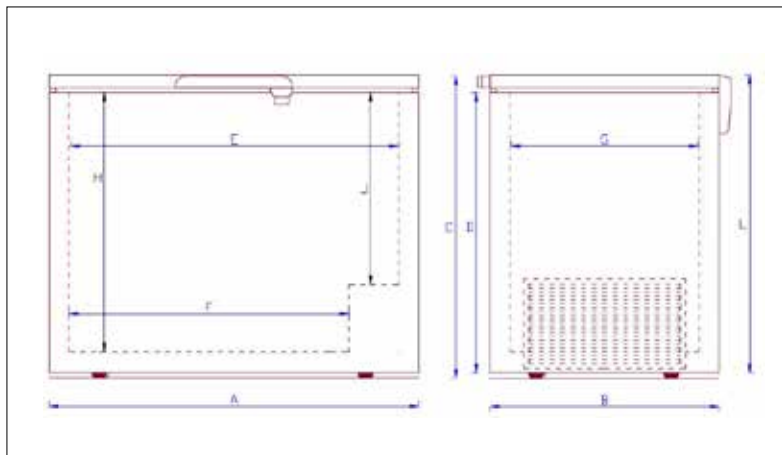

	EL 12	EL 22	EL 35	EL 45	EL 53	EL 61	EL 71
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +31
Gross volume, litres	110	215	347	447	527	607	701
Net volume, litres	98	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Standard refrigerant	R600a	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant available: R600a / R290/ R134a	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h (kwh) at 18 deg	0,49	0,71	0,9	1,05	1,3	1,52	1,95
Input power (watt):	52	124	141	146	211	211	245
DIMENSIONS							
External dimensions (WxDxH)	545x590x840	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865	1805x695x865
Internal dimensions (WxDxH)	400x400x670	606x536x697	936x536x697	1186x536x697	1386x536x697	1586x536x697	1686x576x741
Dimension A	545	725	1055	1305	1505	1705	1805
Dimension B	590	655	655	655	655	655	695
Dimension C	840	865	865	865	865	865	865
Dimension D	770	780	780	780	780	780	780
Dimension E	400	606	936	1186	1386	1586	1686
Dimension F	220	406	736	986	1186	1386	1486
Dimension G	400	536	536	536	536	536	576
Dimension H	670	697	697	697	697	697	741
Dimension J	465	447	447	447	447	447	491
Dimension L	825	850	850	850	850	850	850
Insulation, mm	65	60	60	60	60	60	60
ACCESSORIES							
Dividers	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	1	2	2	3	3	3
Max. Number of basket possible	1	1	2	3	4	4	6
Castors	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Lock	n/a	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	n/a	Optional	Optional	Optional	Optional	Optional	Optional
OTHER DATA							
Outer cabinet	White	White	White	White	White	White	White
Inner cabinet		Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option		Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual	Manual
Power	220 v/50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	n/a	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog	Analog	Analog
Freezing capacity kg/ 24 h	6,5	15	22	27	36	38	43
Light in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Calendar in Lid	n/a	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Net weight, kg	31	43	54	64	67	77	85
Gross weight, kg	34	46	58	68	71	82	89
SHIPPING							
20' cont. Capacity	112	42	30	24	20	18	14
40' cont. Capacity	228	90	64	50	46	40	30
40' HC cont. Capacity	228	126	88	62	61	52	42
Standard Trailer capacity	276	102	74	60	52	44	42

*Handle for EL 12 is integrated in the lid.



FEATURES

- Low service costs
- Long life
- Available in all climate classes
- Baskets available equal to EL freezers

| EL SS |

STAINLESS STEEL LID
FOR PREPAIRING FOOD



EL 45 SS




EL 61 SS



AVAILABLE IN 6 SIZES



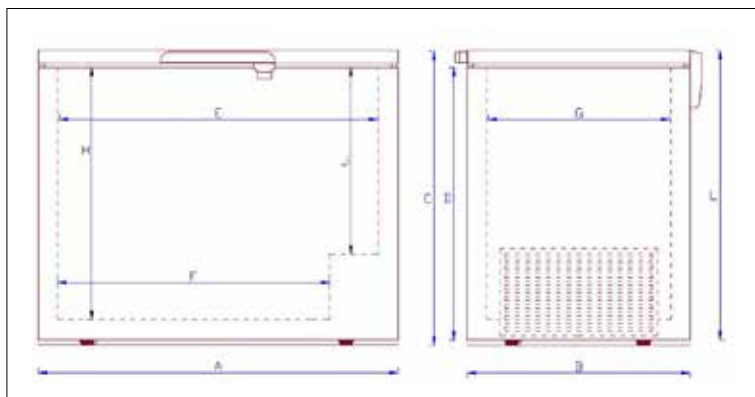

	EL 22 SS	EL 35 SS	EL 45 SS	EL 53 SS	EL 61 SS	EL 71 SS
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	215	347	447	527	607	701
Net volume, litres	205	331	427	504	580	670
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Standard refrigerant	R134a	R134a	R134a	R134a	R134a	R134a
Refrigerant available: R600a / R290	Yes	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh at 18 deg. C	0,71	0,9	1,05	1,3	1,52	1,95
Input power (watt):	124	141	146	211	211	245
DIMENSIONS						
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865	1805x695x865
Internal dimensions (WxDxH)	606x536x697	936x536x697	1186x536x697	1386x536x697	1586x536x697	1686x576x741
Dimension A	725	1055	1305	1505	1705	1805
Dimension B	655	655	655	655	655	695
Dimension C	865	865	865	865	865	865
Dimension D	780	780	780	780	780	780
Dimension E	606	936	1186	1386	1586	1686
Dimension F	406	736	986	1186	1386	1486
Dimension G	536	536	536	536	536	576
Dimension H	697	697	697	697	697	741
Dimension J	447	447	447	447	447	491
Dimension L	850	850	850	850	850	850
Insulation, mm	60	60	60	60	60	60
ACCESSORIES						
Dividers	Optional	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	2	2	3	3	3
Max. Number of basket possible	1	2	3	4	4	6
Castors	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional	Optional
Lock	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	Optional	Optional	Optional	Optional	Optional	Optional
OTHER DATA						
Outer cabinet	White	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Lid	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301	Stainless EN 1.4301
Type of cooling	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog	Analog
Freezing capacity kg / 24 h	15	22	27	36	38	43
Light in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Calendar in Lid	Incl.	Incl.	Incl.	Incl.	Incl.	Incl.
Net weight, kg	43	54	64	67	77	85
Gross weight, kg	46	58	68	71	82	89
SHIPPING						
20' cont. Capacity	42	30	24	20	18	14
40' cont. Capacity	90	64	50	46	40	30
40' HC cont. Capacity	126	88	62	61	52	42
Standard Trailer capacity	102	74	60	52	44	42



51 XLE

| XLE |

OPTIMAL LOW
ENERGY SOLUTION

FEATURES

- Environmentally friendly
- Low service costs
- Long life
- Available in all climate classes
- 100 mm insulation
- Accessories including baskets
- see page 64



11 XLE




21 XLE



31 XLE



41 XLE

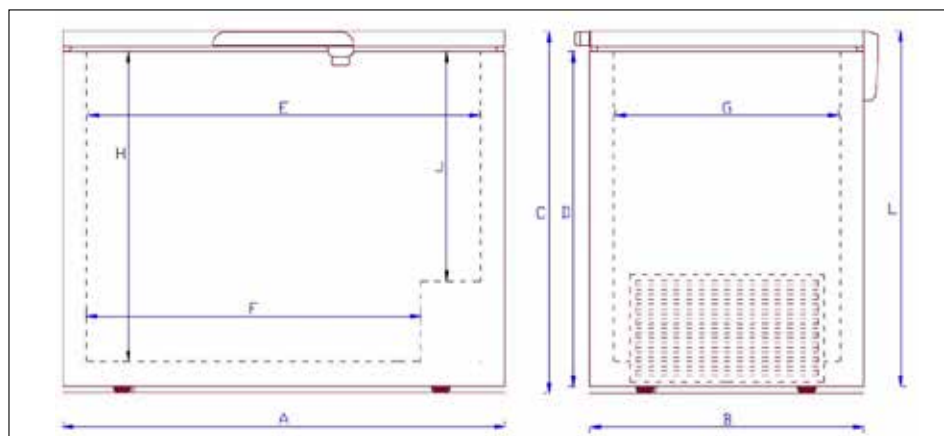

100 MM INSULATION

	11 XLE	21 XLE	31 XLE	41 XLE	51 XLE
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Refrigerant: R600	Yes	Yes	Yes	Yes	Yes
Input power (watt):	210	360	360	400	420
Energy consumption / 24 h (kwh) at 25 degree amb.	0,43	0,55	0,64	0,72	0,81
Energy rating:	A+	A+	A+	A+	A+
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimension (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1500x450x650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation, mm	100	100	100	100	100
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Number of baskets Incl.	1	2	3	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Freezing capacity kg /24 h	16	25	31	34	36
Calendar in lid	Incl.	Incl.	Incl.	Incl.	Incl.
Light in lid	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Thermometer	Optional	Optional	Optional	Optional	Optional
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44



UNI 31

FEATURES

- Low service costs
- Long life
- Storage of special products – including tuna fish or special ice cream
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)
- Accessories including baskets – see page 64

| UNI |

PERFECT FOR RELIABLE
STORING IN LOW TEMPERATURE



UNI 11




UNI 21



UNI 41



UNI 51

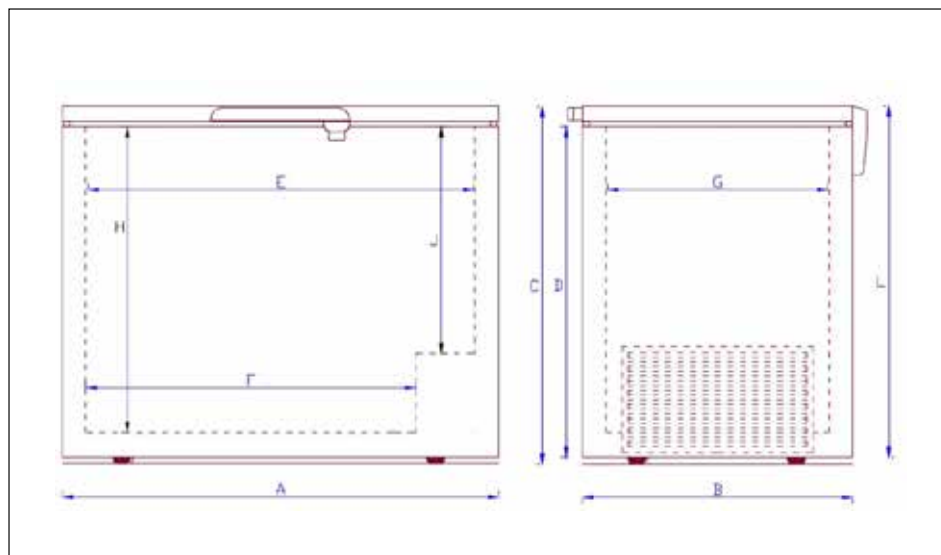

	UNI 11	UNI 21	UNI 31	UNI 41	UNI 51
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
Temperature range inside unit	-10 to -45	-10 to -45	-10 to -45	-10 to -45	-10 to -45
Refrigerant: R290	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh-estimated	3,1	4,1	4,9	5,2	6,4
Input power	190	305	340	360	380
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1500x450x650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation, mm	100	100	100	100	100
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)	1	2	3	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.	Incl.	Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Potential free contact	Incl.	Incl.	Incl.	Incl.	Incl.
Thermostat	Digital	Digital	Digital	Digital	Digital
Net weight, kg	46	59	67	74	80
Gross weight, kg	49	62	71	78	85
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
Standard Trailer capacity	102	74	60	52	44



FEATURES

- Low service costs
- Long life
- Acoustic alarm
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

| PRO |

IDEAL FOR STORING
TUNA FISH FOR SUSHI



PRO 11



PRO 21




PRO 31



PRO 41



PRO 60

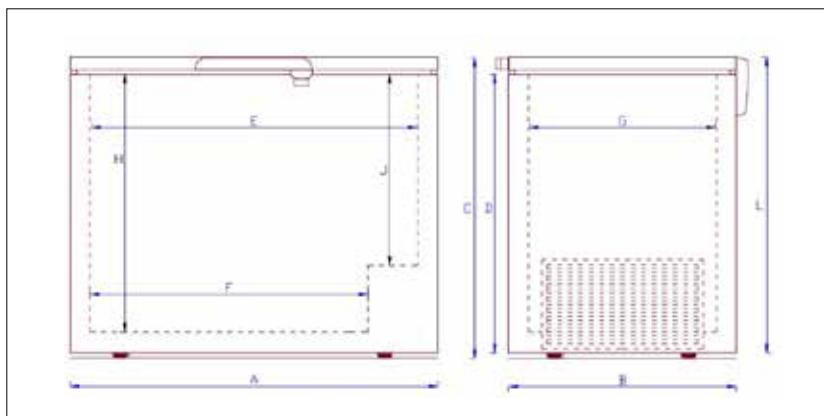

	PRO 11	PRO 21	PRO 31	PRO 41	PRO 60
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	481
Net volume, litres	130	226	300	360	481
Temperature range inside unit	-30 to -60	-30 to -60	-30 to -60	-30 to -60	-30 to -60
Refrigerant: Mix of 2 Hydro carbons	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh	4,3	5	5,2	6,1	9,2
Input power (watt)	375	455	544	587	612
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1540x490x670
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1540
Dimension F	320	650	900	1100	1340
Dimension G	450	450	450	450	490
Dimension H	650	650	650	650	670
Dimension J	400	400	400	400	420
Dimension L	850	850	850	850	850
Insulation ,mm	100	100	100	100	80
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)	1	2	3	4	4
Castors w. brakes	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.	Incl.	Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Digital	Digital	Digital	Digital	Digital
Net weight, kg	56	67	80	89	95
Gross weight, kg	63	74	88	97	104
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	44	38
Standard Trailer capacity	102	72	56	50	44



SUPERMARKET FREEZERS



DSM 220

| DSM |

FLOOR SPACE **OPTIMIZER**



DSM 146

FEATURES

- Capacity / Volume: 8% more than 2 units GSM 200
- 27 % less floor space than 2 units GSM 200
- 28% energy saving compared with 2 units GSM 200
- Patented Design

	DSM 146	DSM 220
Climate class	3LN1	3LN1
Ambient temperature range	+10 to +25	+10 to +25
Climate class 4 and 7 (4+)	n/a	n/a
Gross volume, litres	425	1697
Net volume, litres	334	1255
Temperature range inside unit	-18 to -28	-18 to -28
Refrigerant: R290	Yes	Yes
Compressors	1 pcs	2 pcs
Energy consumption / 24 h kwh at 25 deg. C	3,9	9,2
Input power (watt):	237	580/665
DIMENSIONS		
External dimensions (WxDxH)	1470x812x915	2150x1465x930
Insulation ,mm	80	80
Packing dimension (WxDxH)	1530x920x1000	2240x1550x1050
ACCESSORIES		
Baskets	n/a	n/a
Dividers	Optional	4
Feet	Incl.	Incl.
Bumper bar	Standard	Standard
Extra LED	Optional	Optional
Single or double shelve	Optional	Optional
Price ticket holder	Optional	Optional
OTHER DATA		
Outer cabinet	White	White
Inner cabinet	White	White
Type of cooling	Static	Static
Digital controller	Yes	Yes
HACCP-Hazard analysis System	Yes	Yes
Automatic defrost	Yes	Yes
Power	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional
No. of compressors	1	2
Net weight, kg	125	198
Gross weight, kg	85	251
SHIPPING		
20' cont. Capacity	16	6
40' cont. Capacity	30	14
40' HC cont. Capacity	30	14
Standard Trailer capacity	46	16



DSM 220



ESM ISLAND

| ESM |

EXCLUSIVE **DISPLAY**



ESM 150



ESM 200




ESM 177



ESM back to back

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)
- Minimum icebuild-up
- Eye Catching design
- LED internal light (option)
- 60 mm insulation

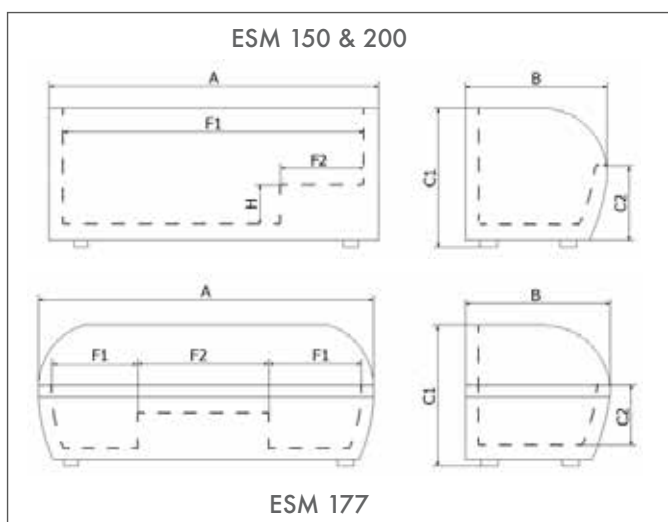

	ESM 150	ESM 200	ESM 177
Climate class	3LN1	3LN1	3LN1
Ambient temperature range	+10 to +25	+10 to +25	+10 to +25
Climate Class 4 and 7(4+)	Optional	Optional	Optional
Gross volume, litres	492	712	520
Net volume, litres	350	518	370
Temperature range inside unit	-18 to -28	-18 to -28	-18 to -28
Refrigerant: R134a / R290	Yes	Yes	Yes
Number of compressors	2	2	2
Energy consumption / 24 h kwh at 25 deg. C	8,7/7,5	7,9/8,4	10,4/9,0
Input power (watt)	546/457	590/526	615/549
DIMENSIONS			
External dimensions (WxDxH)	1500x880x940	2000x880x940	1820x840x900
Internal dimensions (WxDxH)	1360x810xc1/ c2	1860x810xc1/ c2	1640x838x c1/c2
Dimension A	1500	2000	1820
Dimension B	885	885	838
Dimension C1/C2	940/460	940/460	900/445
Dimension F1/F2	1360/-	1860/-	395/840
Dimension H	310	310	310
Insulation, mm	70	70	70
ACCESSORIES			
Baskets	Optional (max. 5)	Optional (max. 5)	Optional (max. 6)
Dividers	Optional	Optional	Optional
Feet	Incl.	Incl.	Incl.
Lock	n/a	n/a	n/a
Bumper bar	Incl.	Incl.	Incl.
Single or double shelf	Optional	Optional	Optional
Price ticket holder	Optional	Optional	Optional
LED light	Optional	Optional	Optional
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	White	White	White
Graphics	Optional	Optional	Optional
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Automatic defrost	Optional	Optional	Optional
Digital controller	Incl.	Incl.	Incl.
Power	220 v/ 50 Hz	220 v/ 50 Hz	220V/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional
Net weight, kg	98	123	100
Gross weight, kg	113	138	125
SHIPPING			
20' cont. Capacity	14	12	12
40' cont. Capacity	28	24	24
40' HC cont. Capacity	28	24	24
Standard Trailer capacity	32	28	28



| GSM |

**HIGH VOLUME AND
PERFECT DISPLAY**

FEATURES

- Low service costs
- Perfect view to the products
- Long life
- Graphics (option)
- Minimum icebuild-up
- Eye Catching design
- LED internal light
- 70 mm insulation
- Auto Defrost (option)
- Switch mode between cooling and freezing (option)



CONTROLLER




GSM 200



GSM ISLAND



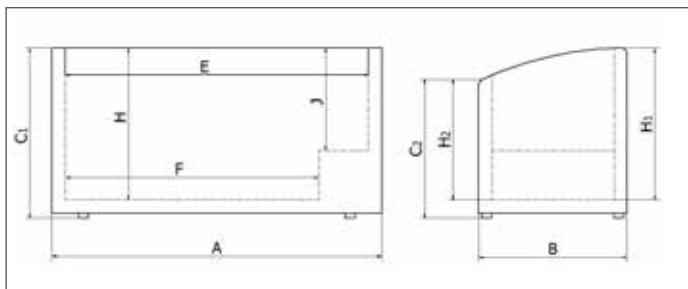

Dimensions according to technical datas below

	GSM 150	GSM 200	GSM 250	GSM 197
Climate class	3LN1	3LN1	3LN1	3LN1
Ambient temp. range	+10 to +25	+10 to +25	+10 to +25	+10 to +25
Climate class 4 and 7 (4+)	Optional	Optional	Optional	Optional
Gross volume, litres	590	800	800	540
Net volume, litres	400	580	580	470
Temperature range inside unit	-18 to -28	-18 to -28	-18 to -28	-18 to -28
Refrigerant: R290	Yes	Yes	Yes	Yes
Number of compressors	2	2	2	2
Energy consumption / 24 h kwh for R290	5,8/4,3	6,6/5,5	7,1/6,2	6,3/5,7
Input power (watt) R290	430/374	484/418	501/435	467/400
DIMENSIONS				
External dimensions (WxDxH)	1520x920x790	2020x920x790	2500x920x790	1990x920x790
Internal dimensions (WxDxH)	1364x775x720	1864x775x720	2344x775x720	1830x775x720
Dimension A	1520	2020	2500	1990
Dimension B	920	920	920	920
Dimension C1	790	790	790	790
Dimension C2	710	710	710	710
Dimension E	1364	1864	2344	1830
Dimension F	1054	1554	2034	1520
Dimensions H1	720	720	720	720
Dimension H2	640	640	640	640
Dimension J	438	438	438	438
Insulation, mm	70	70	70	70
ACCESSORIES				
Number of baskets: standard / maximum	0/3	0/5	0/7	0/0
Number of dividers: standard / maximum	0/2	0/2	0/2	0/2
Feet	Incl.	Incl.	Incl.	Incl.
Lock	n/a	n/a	n/a	n/a
Bumper bar	Incl.	Incl.	Incl.	Incl.
Price ticket holder	Optional	Optional	Optional	Optional
Single or double shelf	Optional	Optional	Optional	Optional
LED light	Incl.	Incl.	Incl.	Incl.
Digital controller	Incl.	Incl.	Incl.	Incl.
Graphics	Optional	Optional	Optional	Optional
OTHER DATA				
Outer cabinet	White	White	White	White
Inner cabinet	White	White	White	White
Type of cooling	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual
Auto defrost	Optional	Optional	Optional	Optional
Power	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz	230 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional
Net weight	98	127	150	121
Gross weight	129	161	190	155
SHIPPING				
20' cont. Capacity	12	12	8	12
40' cont. Capacity	28	24	16	22
40' HC cont. Capacity	42	33	24	33
Standard Trailer capacity	48	39	30	39



FSM 200

| FSM |

TRADITIONAL SUPERMARKET FREEZERS



FSM 150




FSM 200



FSM 250

FEATURES

- Low service costs
- Long life
- Graphics (option)
- Minimum icebuild-up
- 60 mm insulation

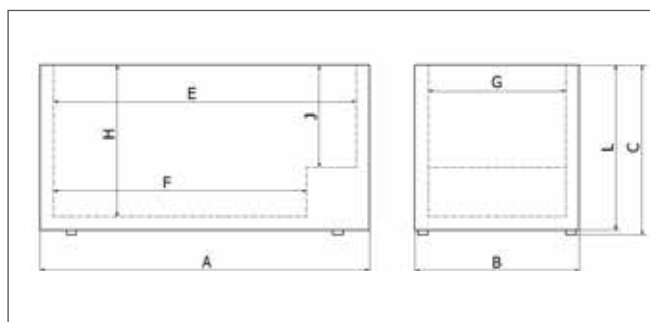

Dimensions according to technical datas below

	FSM 150	FSM 200	FSM 250
Climate class	3LN1	3LN1	3LN1
Ambient temperature range	+10 to +25	+10 to +25	+10 to +25
Climate class4 and 7(4+)	Optional	Optional	Optional
Gross volume, litres	597	839	1032
Net volume, litres	459	652	805
Temperature range inside unit	-18 to -28	-18 to -28	-18 to -28
Refrigerant: R290a	Yes	Yes	Yes
Number of compressors	2	2	2
Energy consumption / 24 h kwh	3,9	4,5	4,9
Input power (watt)	410	594	594
DIMENSIONS			
External dimensions (WxDxH)	1550x960x780	2050x960x780	2500x960x780
Internal dimensions (WxDxH)	1375x790x570	1880x790x570	2280x790x570
Dimension A	1550	2050	2505
Dimension B	960	960	960
Dimension C	780	780	780
Dimension E	1375	1880	2280
Dimension F	1065	1570	1970
Dimension J	280	280	280
Dimension G	790	790	790
Dimension H	570	570	570
Dimension L	700	700	700
Insulation, mm	60	60	60
ACCESSORIES			
Number of baskets: standard / maximum	1/3	1/5	1/7
Number of dividers: standard / maximum	2/5	3/7	3/10
Feet	Incl.	Incl.	Incl.
Lock	n/a	n/a	n/a
Bumper bar	Incl.	Incl.	Incl.
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	White	White	White
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v /50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional
Net weight, kg	81	105	125
Gross weight, kg	96	120	142
SHIPPING			
20' cont. Capacity	12	10	8
40' cont. Capacity	28	22	16
40' HC cont. Capacity	42	33	24
Standard Trailer capacity	48	39	30



DISPLAY
COOLERS



FEATURES

- Low service costs
- Long life
- Graphics (option)

| CABC COOLER |

| CBC COOLER |

TOP CLASS **DISPLAY AND STORAGE**



CABC 22



CBC 35




CBC 45



CABC 53



CBC 61

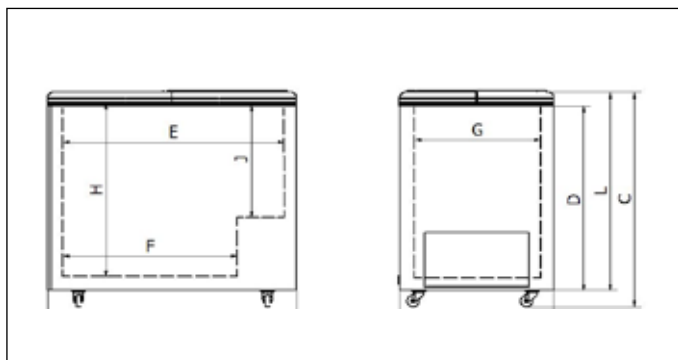

	CABC 22/CBC 22	CABC 35/CBC 35	CABC 45/CBC 45	CABC 53/CBC 53	CABC 61/CBC 61
Climate Class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	209	337	435	513	590
Net volume, litres	188	304	393	441	509
Temperature range inside unit	+2 to +8	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Refrigerants available: R134a/ R404a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h (R 134a), kwh, at 30 deg C, 60 % running time	1,2	1,8	2,2	2,8	2,8
Input power for R134a (watt)	85	125	150	195	195
DIMENSIONS					
External dimensions (WxDxH)	724x654x916	1054x654x916	1304x654x916	1504x654x916	1704x654x916
Internal dimensions (WxDxH)	606x536x726	936x536x726	1186x536x726	1386x536x726	1586x536x726
Dimension A	724	1054	1304	1504	1704
Dimension B	654	654	654	654	654
Dimension C	916	916	916	916	916
Dimension D	780	780	780	780	780
Dimension E	606	936	1186	1386	1586
Dimension F	406	736	986	1186	1386
Dimension G	536	536	536	536	536
Dimension H	726	726	726	726	726
Dimension J	476	476	476	476	476
Dimension L	846	846	846	846	846
Insulation, mm	60	60	60	60	60
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets	2	3	4	4	4
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	n/a	n/a	n/a	n/a	n/a
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44

FEATURES

- Low service costs
- Long life
- Available in all climate classes



EBC 61

| EBC COOLER |

RELIABLE AND TRADITIONAL
STORAGE



EBC 22



EBC 35



EBC 45




EBC 53



EBC 61



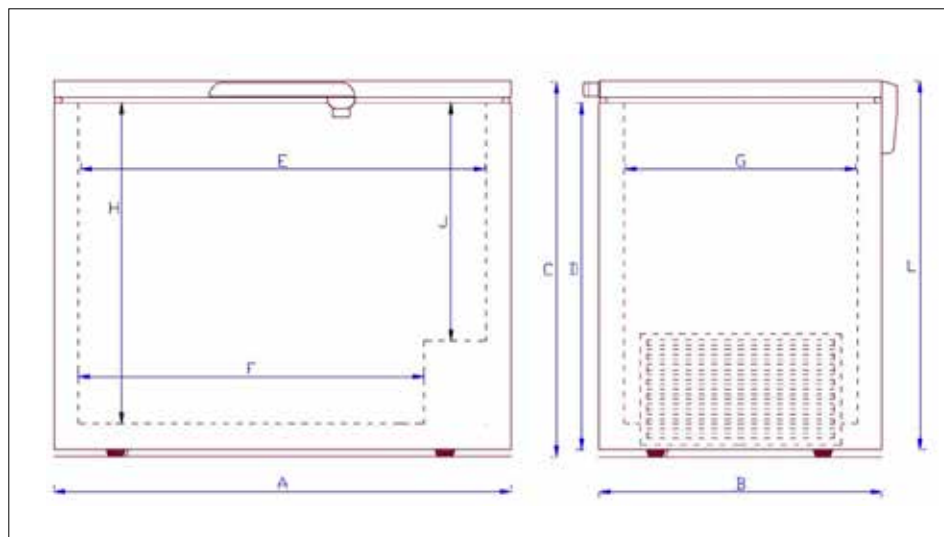

	EBC 22	EBC 35	EBC 45	EBC 53	EBC 61
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	215	347	447	527	607
Net volume, litres	205	331	427	504	580
Temperature range inside unit	+2 to +8	-30 to -60	+2 to +8	+2 to +8	+2 to +8
Refrigerant: R134a	Yes	Yes	Yes	Yes	Yes
Energy cons. / 24 h kwh at 18 deg. C	0,71	0,9	1,05	1,3	1,52
Input power (watt)	124	141	146	211	211
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	606x536x745	936x536x745	1186x536x745	1386x536x745	1586x536x745
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	606	936	1186	1386	1586
Dimension F	406	736	986	1186	1386
Dimension G	536	536	536	536	536
Dimension H	697	697	697	697	697
Dimension J	447	447	447	447	447
Dimension L	850	850	850	850	850
Insulation, mm	60	60	60	60	60
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	2	2	3	3
Max. number of baskets possible	2	2	4	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Not Incl.	Not Incl.	Not Incl.	Not Incl.	Not Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44

| CAN COOLER, BARREL FREEZER & ESC |

A GOOD VIEW



CAN COOLER ETK 41



BARREL FREEZER EFT 86



ESC-BACK BAR

	ETK 41	EFT 86
Ambient temperature range	+10 to +30	+10 to +25
Volume	40	85
Temperature range inside unit	+2 - +12	< -18 C
Refrigerant	R600a	R600a
Energy consumption / 24 h (kwh) at 18 deg	1,8	n/a
DIMENSIONS		
External dimensions (WxDxH)	ø 440	ø 565
Height	7440	836
Insulation	40	50
ACCESSORIES		
Castors	Incl.	Incl.
Lock	n/a	n/a
Thermometer	n/a	n/a
Internal light	n/a	n/a
OTHER DATA		
Outer cabinet	White	white
Inner cabinet	White	white
Graphics	Optional	optional
Type of cooling	Static	Static
Defrost	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 volt / 60 Hz	n/a	n/a
Net weight, kg	24	25
Gross weight, kg	27	27
SHIPPING		
40' cont. Capacity	375	160

	ESC 139	ESC 209	ESC 309
Ambient temperature range	+10 to +25	+10 to +25	+10 to +25
Volume	124	207	335
Temperature range inside unit	+2 - +10	+2 - +10	+2 - +10
Refrigerant	R600a	R600a	R600a
Energy consumption / 24 h (kwh) at 18 deg	1,3	1,8	2,3
DIMENSIONS			
External dimensions (WxDxH)	555x520x865	865x520x865	1350x520x865
OTHER DATA			
Shelves	2	4	6
Ajustable feet	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.
Internal light	Incl.	Incl.	Incl.
Outer cabinet	Black	Black	Black
Inner cabinet	Alu	Alu	Alu
Electronic controller	Incl.	Incl.	Incl.
Type of cooling	Static	Static	Static
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Net weight, kg	31	58	77
Gross weight, kg	34	63	82
SHIPPING			
40' cont. Capacity	160	105	66

FEATURES

- Graphics (option)



FEATURES

- Flexible unit
- Low service costs
- Available in all climate classes
- Graphics (option)
- Temperature range: +2 to 8 degree or -14 to -23 degree

We offer a high quality and flexible product, which can either be used as a cooler or as a freezer. You just have to turn the switch to choose. Both versions has its own thermostat. Ask for minimum order quantity.

| COMBI |

COMBINATION OF COOLER AND FREEZER



CVG 45



FOCUS 151 RED



TRICYCLE FOR MOBILUX 11



CSG 53

A close-up photograph of a laboratory setting. A hand is holding a glass pipette, dispensing a clear liquid into a petri dish. The petri dish is partially filled with a similar liquid. In the background, other petri dishes and a test tube are visible, all slightly out of focus. The overall color palette is dominated by light blues and whites, giving it a clean, clinical appearance.

LABORATORY EQUIPMENT

FEATURES

- Used by universities, hospitals and research institutes for long term storing of blood, skincells, DNA and organs
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)



LAB 11

| LAB |

RELIABLE
STORING AT **LOW**
TEMPERATURE



LAB 31




LAB 51



DIGITAL CONTROLLER



ALARM BOX

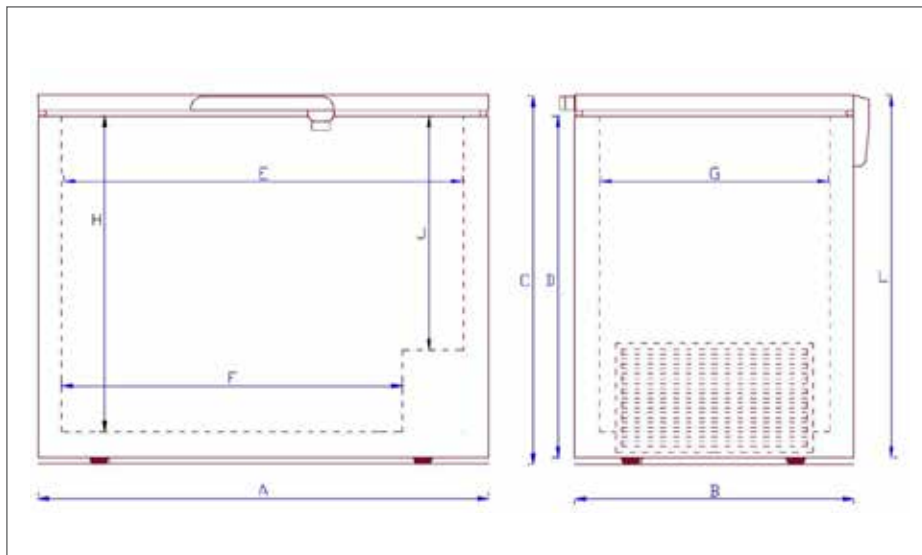

Inner lids (left hand side) which are mandatory for optimized function

	LAB 11	LAB 31	LAB 51
Ambient temperature range	+10 to +30	+10 to +25	+10 to +25
Gross volume, litres	130	300	416
Net volume, litres	130	300	416
Temperature range inside unit	-50 to -86	-50 to -86	-50 to -86
Refrigerant: Mix of Hydro Carbons	Yes	Yes	Yes
Energy consumption / 24 h kwh	5,8	8,5	10
Input power (watt):	480	710	840
DIMENSIONS			
External dimensions (WxDxH)	725x655x865	1305x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	1100x450x650	1500x450x650
Dimension A	725	1305	1705
Dimension B	655	655	655
Dimension C	865	865	865
Dimension D	780	780	780
Dimension E	520	1100	1500
Dimension F	320	900	1300
Dimension G	450	450	450
Dimension H	650	650	650
Dimension J	400	400	400
Dimension L	850	850	850
Insulation, mm	100	100	100
ACCESSORIES			
Basket and dividers	n/a	n/a	n/a
Castors with brakes	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.
Potential free contact	Incl.	Incl.	Incl.
OTHER DATA			
Outer cabinet	White	White	White
Inner cabinet	Painted steel	Painted steel	Painted steel
Potential free contact	Incl.	Incl.	Incl.
Inner foam lids Incl. (pcs)	2	5	7
Type of cooling	Static	Static	Static
Type of defrost	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	n/a	n/a	n/a
Thermostat	Digital	Digital	Digital
Net weight, kg	56	80	95
Gross weight, kg	63	88	104
SHIPPING			
20' cont. Capacity	42	24	18
40' cont. Capacity	90	50	56
Standard Trailer capacity	102	60	44



FEATURES

- Low service costs
- Long life
- Perfect for storage of rubber and steel for testing
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

| PRO |

LOW TEMPERATURE FOR INDUSTRIAL RESEARCH



PRO 11



PRO 21



PRO 31




DIGITAL CONTROLLER



PRO 41



PRO 60

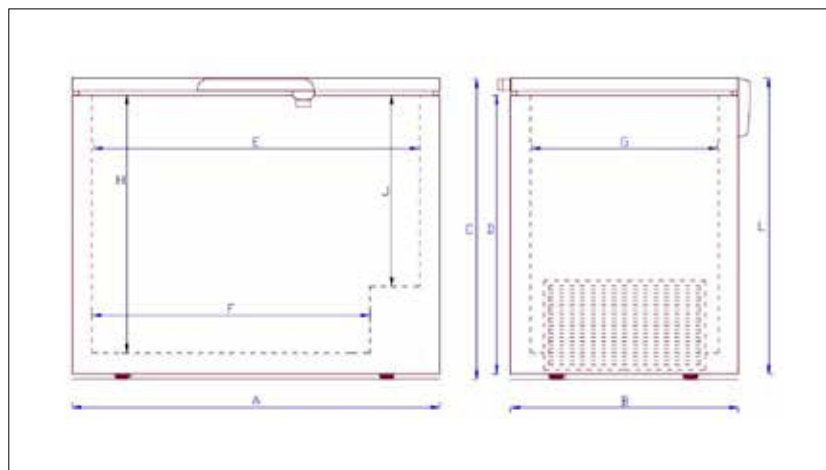

	PRO 11	PRO 21	PRO 31	PRO 41	PRO 60
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	481
Net volume, litres	130	226	300	360	481
Temperature range inside unit	-30 to -60	-30 to -60	-30 to -60	-30 to -60	-30 to -60
Refrigerant: Mix of 2 Hydro carbons	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh	4,3	5	5,2	6,1	9,2
Input power (watt)	375	455	544	587	612
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1540x490x670
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1540
Dimension F	320	650	900	1100	1340
Dimension G	450	450	450	450	490
Dimension H	650	650	650	650	670
Dimension J	400	400	400	400	420
Dimension L	850	850	850	850	850
Insulation ,mm	100	100	100	100	80
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)	1	2	3	4	4
Castors w. brakes	Incl.	Incl.	Incl.	Incl.	Incl.
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.	Incl.	Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Digital	Digital	Digital	Digital	Digital
Net weight, kg	56	67	80	89	95
Gross weight, kg	63	74	88	97	104
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	44	38
Standard Trailer capacity	102	72	56	50	44



UNI 31

FEATURES

- Low service costs
- Long life
- Short term storage of blood and plasma
- Digital controller with potential free contact (which makes it possible to connect it to an external alarm)

| UNI |

PERFECT FOR RELIABLE
STORING IN LOW TEMPERATURE



UNI 11



UNI 21




UNI 41



DIGITAL CONTROLLER



UNI 51

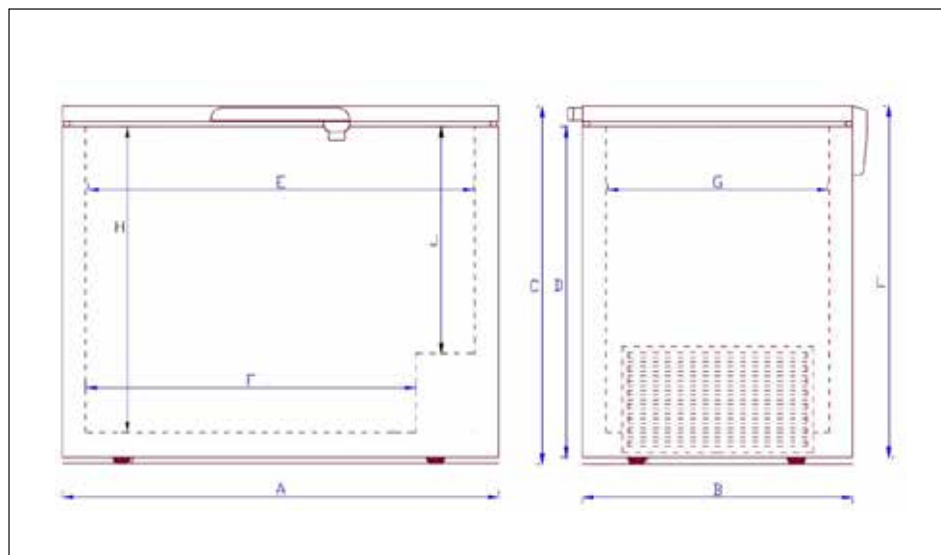

	UNI 11	UNI 21	UNI 31	UNI 41	UNI 51
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
Temperature range inside unit	-10 to -45	-10 to -45	-10 to -45	-10 to -45	-10 to -45
Refrigerant: R290	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh- estimated	3,1	4,1	4,9	5,2	6,4
Input power	190	305	340	360	380
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	520x450x650	850x450x650	1100x450x650	1300x450x650	1500x450x650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation, mm	100	100	100	100	100
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)	1	2	3	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Incl.	Incl.	Incl.	Incl.	Incl.
Digital controller w. acoustic alarm	Incl.	Incl.	Incl.	Incl.	Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Potential free contact	Incl.	Incl.	Incl.	Incl.	Incl.
Thermostat	Digital	Digital	Digital	Digital	Digital
Net weight, kg	46	59	67	74	80
Gross weight, kg	49	62	71	78	85
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
Standard Trailer capacity	102	74	60	52	44

| ACCESSORIES |

BASKETS

FOCUS



BASKET: KURVC75-01
W X H: 215 X 226 MM
DIVIDER: SKILC75-01



BASKET: KURVC75-02
W X H: 185 X 226 MM
DIVIDER: SKILC75-02



SCOOP BASKET:
KURVSCOOPF3+1
W X H: 442 X 123 MM




SCOOPBASKET:
KURVSCOOPF4+1
W X H: 587 X 123 MM




DIVIDER: DELERIST
W X H: 430 X 430 MM



DIVIDER: DELERIST2
W X H: 480 X 490 MM



FALSE BOTTOM: FALSKBUND4
W X H: 315 X 252 MM

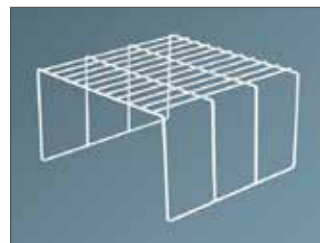

FALSE BOTTOM: FALSKBUND5
W X D: 430 X 252 MM



PLEXI DIVIDER

EL-LTS + UNI + XLE+ UNI + PRO




BASKET: KURVSLEDD
DIVIDER: SKIL CX2
W X H: 231 X 260 MM




BASKET: KURVSLEDD2
W X H: 205 X 260 MM
DIVIDER: SKIL SLEDD2



BASKET: KURVSLEH
W X H: 267 X 180 MM



FALSE BOTTOM: FALSKBUND5
W X H: 430 X 252 M



FALSE BOTTOM: FALSKBUND4
W X H: 315 X 252 MM

CVG + EL




BASKET: KURVC145
W X H: 225 X 320 MM
DIVIDER: SKILC145




BASKET: KURVC150
W X H: 278 X 196 MM



DIVIDER: DELERIST1
(ONLY FOR CVG)
W X H: 530 X 705 MM

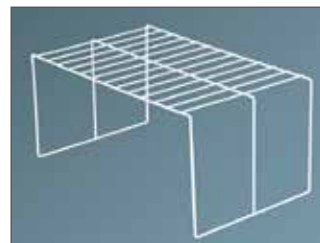

FALSE BOTTOM:
FALSKBUND1
W X H: 320 X 252 MM



FALSE BOTTOM: FALSKBUND 2
W X D: 200 X 252 MM



DIVIDER: DELERIST2
(ONLY FOR EL)
W X H: 480 X 490 MM



BASKET: C200F
(ONLY FOR EL71)
W X D: 278 X 311

NOVA




BASKET: KURVN1
W X H: 278 X 235 MM
DIVIDER: SKILCX3



SCOOP BASKET:
KURVSCOOPICEN3+1
W X H: 442 X 125 MM



SCOOP BASKET:
KURVSCOOPICEN4+1
W X H: 587 X 125 MM

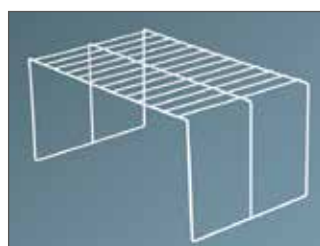

FALSE BOTTOM:
FALSKBUND1
W X H: 320 X 252 MM



FALSE BOTTOM:
FALSKBUND 2
W X D: 200 X 252 MM



SCOOP BASKET: KURVSCOOPN4
W: 348 MM
(STAINLESS STEEL)



SCOOP BASKET: KURVSCOOPN5
W: 516 MM
(STAINLESS STEEL)

| ACCESSORIES |

BASKETS

CSG + CAL



BASKET: KURVC100
W X H: 278 X 203 MM
DIVIDER: SKILCX3



SCOOP BASKET:
KURVSCOOP3
W X H: 150 X 117 MM



SCOOP BASKET:
KURVSCOOPICE3+1
W X H: 442 X 125 MM



SCOOP BASKET:
KURVSCOOPICE4+1
W X H: 587 X 125 MM



FALSE BOTTOM:
FALSKBUND1
W X H: 320 X 252 MM



DIVIDER:
DELERIST1
W X H: 530 X 705 MM



FALSE BOTTOM:
FALSKBUND 2
W X D: 200 X 252 MM



SCOOP BASKET: KURVSCOOP4
W: 348 MM
(STAINLESS STEEL)



SCOOP BASKET: KURVSCOOP5
W: 516 MM
(STAINLESS STEEL)



BASKET: C200F
(ONLY FOR CSG73)
W X D: 278 X 311

MOBILUX



BASKET: KURVSLEBATH
W X H: 210 X 270 MM



SCOOP BASKET:
KURVSCOOPF3+1
W X H: 442 X 123 MM



BASKET: KURVSLEDD
W X H: 231 X 260 MM



SUPERMARKET DIVIDER FOR
CVG 61, CAL 61 AND EL 61

| ACCESSORIES |

SUPERMARKET FREEZERS

DSM + ESM + FSM + GSM



SINGLE SHELF - 1
FOR GSM & ESM



DOUBLE SHELF - 1
FOR DSM, GSM & ESM



SINGLE SHELF - 2
FOR GSM & ESM



DOUBLE SHELF - 2
FOR GSM & ESM



UNION KIT
FOR GSM & ESM



PRICE HOLDER
FOR FSM



PRICE HOLDER
FOR DSM, GSM & ESM

| ACCESSORIES |

ADDITIONAL EQUIPMENT

LOCKS



82CYL1SG4 LOCK KIT FOR
CSG + CAL CABINETS



E54SD + CYLINDER 2
LOCK FOR NOVA AND FOCUS

THERMOMETER




TERMOMET1
THERMOMETER FOR BASKETS



TERMOMETRK70
CIRCULAR THERMOMETER
FOR BASKET

CASTORS

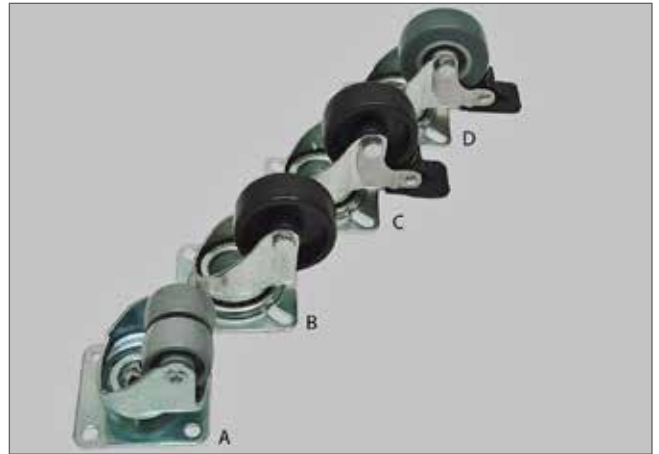

A)	HJULØ32DOBB	DOUBLE CASTORS	Ø32MM
B)	HJULØ50	SINGLE CASTOR	Ø50
C)	HJULBØ50	SINGLE CASTOR WITH BRAKE	
D)	HJULBØ50GRÅ	SINGLE CASTOR W BRAKE- SOFT	



FTERMOMETB2
DIGITAL THERMOMETER

DISPLAY



HBACKB22C.HBACKB71C
BACKBOARD



HLS2222.HLS2271
S-DISPLAY

LIGHT




8100.0610.8100.0614
LED LIGHT FOR FOCUS

BUMPERBAR



HBB22.HBB71
BUMPERBAR

KICKPLATE



SPARKPL
KICKPLATE

CANOPY/SNEEZEGUARD



DELUXE
9100.1110-1114



CLASSIC
9100.1100-1104



LØGSTØRVEJ 81 · 9500 HOBRO · DENMARK · TEL: +45 9657 2222 · FAX: +45 9852 4685